



Durable Print Solutions

SR30 Wax Ribbon

Technical data

January, 2012

Product Description

SR30 is an outstanding wax formula when a higher level of scratch and smear resistance is needed in labeling applications including uncoated, and coated paper and tags.


Product Specifications

Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

Ink Type	Wax
Total Thickness	7.0 +/-1.0 Micrometer
Base Film Thickness	4.5 +/-0.5 Micrometer
Ink Thickness	2.5 +/-0.5 Micrometer
Melting Point	80°
Print Speed	up to 8.0 ips
Print Density	2.0 Densitometer

(Print density depends on print conditions)

Rader Chart

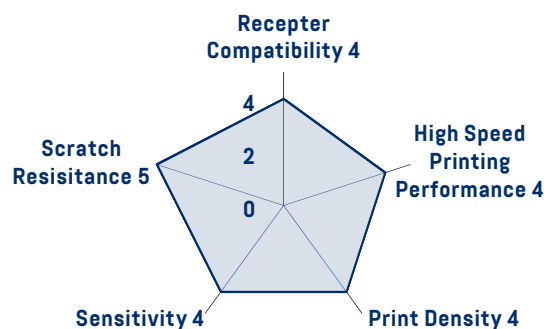

Application Ideas

- Shipping Labels
- Storage Labels
- Retail Tags
- Pharmaceutical Labels
- Flexible Package Labels

Recommended Label Stock

- Coated & Uncoated paper
- Synthetic paper

Storage Conditions

Temperature: 5 to 35°C (41 to 95F)
Humidity: 45 to 85 % RH
Keep away from direct sunlight, high temperature and humidity.



Durable Print Solutions

SR30 Wax Ribbon

Technical Information

The technical information, recommendations and other statements contained in this document are based upon tests or experience that Rebo believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use

Many factors beyond Rebo's control and uniquely within user's knowledge and control can affect the use and performance of a Rebo product in a particular application. Given the variety of factors that can affect the use and performance of a Rebo product, user is solely responsible for evaluating the Rebo product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer

Unless an additional warranty is specifically stated on the applicable Rebo product packaging or product literature, Rebo warrants that each Rebo product meets the applicable REBO product specification at the time REBO ships the product. REBO MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.

If the Rebo product does not conform to this warranty, then the sole and exclusive remedy is, at Rebo's option, replacement of the Rebo product or refund of the purchase price.

Limitation of Liability

Except where prohibited by law, Rebo will not be liable for any loss or damage arising from the Rebo product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Rebo B.V.

Beckerijnghstraat 21
P.O. box 125 | 3760 AC Soest
The Netherlands

T. +31 (0)35 - 601 69 41
www.rebosystems.com